

## HDMI Video Equipment Series

HM4D

### Features

- 4K x 2K 3D HDMI Video
- 120 Meters IP Network Extension With CAT5/6 Cable
- UTP Cable With IEEE 568B Standard
- HDMI Output at 720P or 1080P
- Compliance HDCP and HDMI 1.3b
- Signal Rate up to 2.25 Gbps for 1080P Display
- Dolby Digital Audio
- Auto Adjustment for Feedback, Equalization and Amplify
- Inner and Outer Power Supply Provided
- UTP Cable correction




### MAIN PARAMETERS

HDMI Video Input	
Channel	1
Format	EIA/CEA 861
Protocol	HDCP, HDMI 1.3b
Resolutions	720p@50/60HZ 1080i@50/60HZ
Connector	HDMI Female Plug
Environment	
Operating	-20 <sup>o</sup> C to +60 <sup>o</sup> C
Storage	-40 <sup>o</sup> C to + 95 <sup>o</sup> C
Humidity	98% Non-Condensing
Power	
Adaptor	+5 VDC @ 0.5 Amp

HDMI Video Output	
Channel	1
Format	EIA/CEA 861
Protocol	HDCP, HDMI 1.3b
Resolutions	720p@50/60HZ 1080i@50/60HZ
Connector	HDMI Female Plug
Network Transmission	RJ45 Connector
Transmission Distance	120 Meters Over CAT6
Physical	
Dimensions	3.5" x 2.5" x 1.0"
Weight	0.5 lb.

### APPLICATION

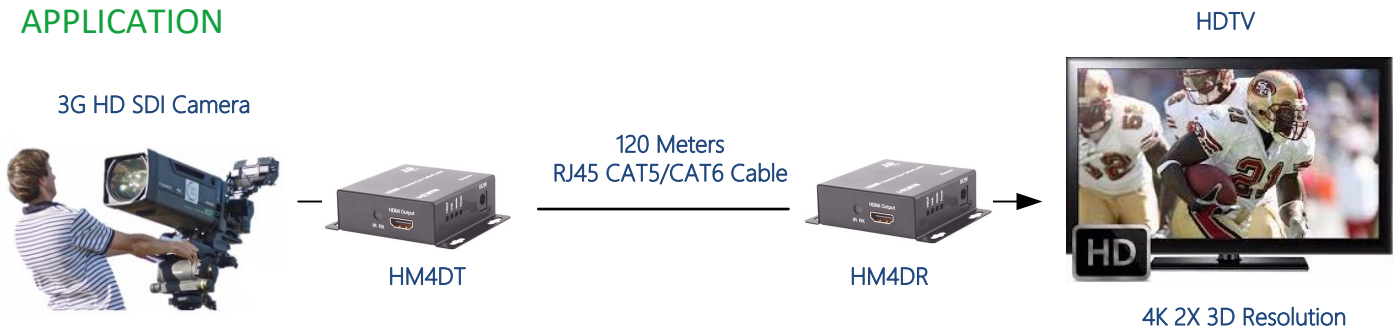

Typical HM3D Application

### Ordering Information

Model	Descriptions
HM4DT	1 Channel HDMI Video Extension (TX) 120 Meters CAT5/CAT6 (RJ45), +5 VDC
HM4DR	1 Channel HDMI Video Extension (RX) 120 Meters CAT5/CAT6 (RJ45), +5 VDC